


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.625	168.3
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.453	11.5
CROWN WHEEL SPIGOT DIA	D2	5.5617	141.3
BEARING DIA	D3	1.690	42.9
BEARING DISTANCE	L1	4.925	125.1
SPIGOT LENGTH	L2	1.115	28.3
	L2/A	1.115	28.3
OVERALL LENGTH	L3	7.155	181.7
BEARING/CROWN WHEEL	L4	0.942	23.9
BORE	D4	1.304	31.1

DRIVE SHAFT SPLINE:-

No. OF TEETH	19
PITCH	16/32 DP
TYPE	FLAT ROOT SIDE FIT
PRESSURE ANGLE	30 DEG

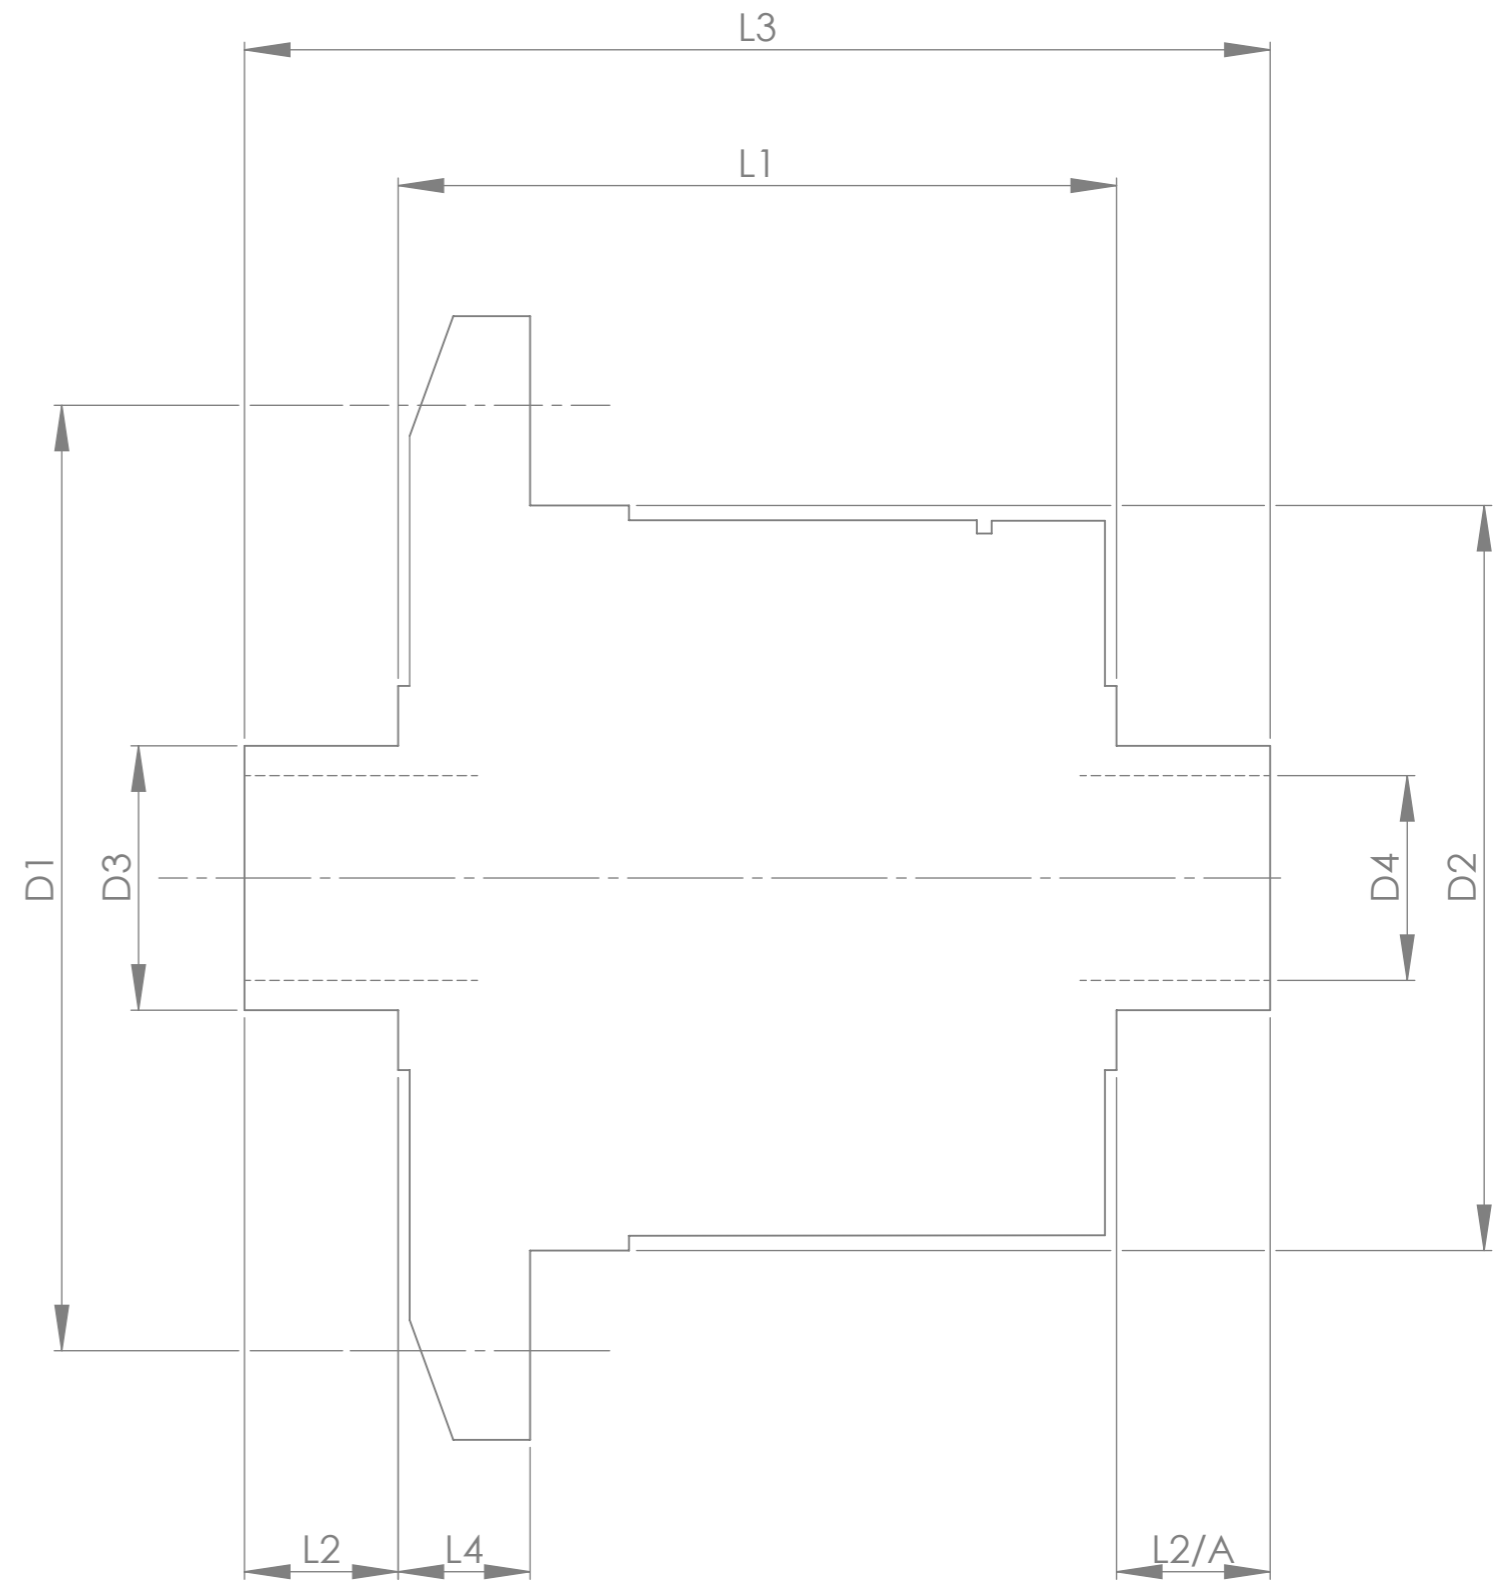

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
<b>Drg. No.</b> QDF1W

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN THE EXCLUSIVE PROPERTY OF RT QUAIPE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	
<b>Used In.</b> JAGUAR Saloon / E Type	( IRS - 4HA )